



CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR § 1.10

"EXPRESS MAIL" mailing label number:

Date of Mailing: September 21, 2000

EL438820037US

I hereby certify that I have caused the documents indicated below to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 CFR § 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231 and mailed on the above Date of Mailing with the above "Express Mail" mailing label number

Susan L. Klotz

Typed or printed name of person mailing paper

SIGNATURE of person mailing paper or fee

or fee

Box PATENT APPLICATION

Assistant Commissioner for Patents

Washington, D.C. 20231

Attorney Docket Number:

12293:41

Re:

New Utility Application

Applicant:

Daniel M. Lewin, Cambridge, Massachusetts;

Bruce Maggs, Pittsburgh, Pennsylvania; and

John Josef Kloninger, Cambridge,

Massachusetts

Filing Date: September 21, 2000

Title:

INTERNET CONTENT DELIVERY SERVICE WITH THIRD

PARTY CACHE INTERFACE SUPPORT

Dear Sir:

Transmitted herewith for filing are the following:

Specification (24 pages); Claims (1 page); Abstract (1 page); Drawings (4 pages)

 $\frac{\mathbf{X}}{\mathbf{X}}$ Utility filing fee in the amount of \$690 (please charge deposit account 501343 for filing fee; duplicate copy of transmittal sheet attached)

<u>X</u> Declaration and Power of Attorney (unsigned)

X A self-addressed, stamped post card to be returned to sender.

Respectfully submitted

HUGHES & LUC

By:

Theodore Stevenson, III, Reg. No. 39,040

ATTORNEYS FOR APPLICANT

1717 Main Street, Suite 2800 Dallas, Texas 75201 (214) 939-5672

20

25

INTERNET CONTENT DELIVERY SERVICE WITH THIRD PARTY CACHE INTERFACE SUPPORT

This application contains subject matter protected by copyright. All rights reserved.

BACKGROUND OF THE INVENTION

Technical Field

5

The present invention relates generally to high-performance, fault-tolerant web content delivery.

It is known in the prior art to distribute media-rich web objects away from busy

10 Description of the Related Art

home sites to a network of content servers located across multiple major Internet backbone networks. One such content delivery service (CDS) is known as FreeFlow, which is available from Akamai Technologies, Inc. of Cambridge, Massachusetts.

Akamai operates a global content delivery network (CDN) comprising a large number of distributed content servers, network mapping servers, and associated mechanisms to track reporting and administration of its content delivery service. The Akamai content servers are typically located at edge-of-network access points such as Internet Points-of-Presence (POPs).

In operation of the FreeFlow CDS, a software tool is used to tag embedded web page objects, such as graphics and images, for delivery via the CDN. Typically, the objects are tagged by transforming web page Uniform Resource Locators (URLs) that identify those objects. The objects identified by the modified URLs are then hosted on the CDN content servers. In a typical user interaction with a FreeFlow-enabled web site, the user's browser sends a request for a web page to the site. In response, the web site

10

15

returns the page markup language (e.g., HTML) code as usual, except that the embedded object URLs have been modified to point to the content delivery service. As a result, the browser next requests and tries to obtain the media-rich embedded objects from an optimally-located delivery service server, instead of from the content provider's site. The above-described web content delivery service provides significant advantages, namely, faster downloads for end-users, reduced load on the home site, flash crowd protection, easier web site management and infrastructure scaling, and the ability to distribute media-rich objects effectively.

There are a number of third party vendors of HTTP caches. These caches would be quite useful in a content delivery service as they can cache and serve content that has been tagged for delivery by the CDS. While it would be desirable to enable third party caches to become content servers in the CDN, complications arise because the CDS does not have a priori knowledge of the locations and configurations of these machines, nor does it have administrative access to them at runtime. Thus, it has not been possible to enable third party caches to readily "join" a CDN. The present invention addresses this need in the content delivery art.

10

15

20

BRIEF SUMMARY OF THE INVENTION

Third party cache appliances are configured into a content delivery service to enable such devices to cache and serve content that has been tagged for delivery by the service. The invention enables the content delivery service to extend the reach of its network while taking advantage of high performance, off-the-shelf cache appliances. If the third party caches comprise part of a third party content delivery network, the interconnection of caches to the CDS according to the present invention enables the third party network to assume some given responsibility for delivering the content. To facilitate such "content peering," the CDS may also include a traffic analysis mechanism to provide the third party network with preferably real-time data identifying the content delivered by the CDS from the third party caches. The CDS may also include a logging mechanism to generate appropriate billing and reporting of the third party content that is delivered from the third party cache appliances that have been joined into the content delivery network according to the invention.

The foregoing has outlined some of the more pertinent objects and features of the present invention. These objects should be construed to be merely illustrative of some of the more prominent features and applications of the invention. Many other beneficial results can be attained by applying the disclosed invention in a different manner or by modifying the invention as will be described. Accordingly, other objects and a fuller understanding of the invention may be had by referring to the following Detailed Description of the Preferred Embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a content delivery service in which the present invention may be implemented;

Figure 2 is a simplified diagram illustrating how a content provider site operates

with the content delivery service;

Figure 3 is a simplified representation of how a third party cache is registered to join the CDN according to the present invention;

Figure 4 illustrates how the third party cache functions as a transparent cache within the CDN following the registration process;

Figure 5 is a simplified flowchart that illustrates how a third party cache operates within the CDN; and

Figure 6 is a simplified flowchart illustrating how the cache obtains content from the CDN.

10

15

20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 is a diagram illustrating an illustrative content delivery service in which the present invention may be implemented. The inventive may likewise be implemented with other known content delivery services or systems. In the illustrative embodiment, the content delivery service (CDS) comprises a preferably global content delivery network (CDN) 100 of content delivery servers 102a-n, a dynamic domain name service (DNS) system 104, and a tool 106 that allows content to be tagged for inclusion on the network. Generally, the content delivery service allows the network of content delivery servers 102a-n to serve a large number of clients efficiently. Although not meant to be limiting, a typical server (such as content server 102) is a Pentium-based caching appliance running the Linux operating system with about 1 GB RAM and between about 40-80 GB of disk storage. As also seen in **Figure 1**, the content delivery service may include a network operations center (NOC) 112 for monitoring the network to ensure that key processes are running, systems have not exceeded capacity, and that sets of content servers (so-called regions) are interacting properly. A content provider may also have access to a monitoring suite 114 that includes tools for both real-time and historic analysis of customer data. One tool is a traffic analyzer 116 that provides multiple monitoring views that enable quick access to network and customer-specific traffic information. A reporter 118 allows for viewing of historical data. A billing tool 118 may be used to generate appropriate billing information for the content provider, who typically pays for the service as a function of the amount of content delivered by the CDN.

10

15

20

High-performance content delivery is provided by directing requests for mediarich web objects to the content delivery service network. In one known technique, known as Akamai FreeFlow content delivery, content is first tagged for delivery by the tool 106, which, for example, may be executed by a content provider at the content provider's web site 108. The tool 106 converts web page URLs to modified resource locators, called ARLs for convenience. Figure 2 illustrates how the web site 208 operates after given embedded objects in a web page have been modified with ARLs. As illustrated, the content provider's web servers 200 preferably still serve the basic or "base" HTML page 202, although this is not a requirement. However, the URLs of the embedded objects within that page have been modified (into ARLs) and no longer resolve to the content provider's site in the first instance, but rather to the content delivery service network 205.

According to the present invention, third party caches are added to the content delivery service's CDN to cache and deliver content. As used herein, a "third party" cache refers to a machine deployed by an entity (e.g., a network such as an ISP, a corporate intranet, an internetwork provider, or the like) other than the content delivery service itself. Typically, the third party cache is a box purchased or otherwise obtained from a cache vendor (e.g., CacheFlow, Cisco, InfoLibria, NetApp, Inktomi, or the like) and deployed in the owner's network. The cache may also comprise part of a third party content delivery network. When third party caches are joined into the content delivery service according to the invention, content may be shared across the resulting composite network. This sharing of content is sometimes referred to herein as "content sharing" or "content peering." Thus, according to the invention, at least one third party appliance is

10

15

20

joined into the content delivery service's CDN as a cache to facilitate caching and delivery of content from that cache.

Although not always required, typically a third party cache is first "registered" with the content delivery network. Thereafter, the third party cache may be used to cache and deliver content. Registration (or all the aspects thereof) may not be required, for example, if the CDN and third party vendor preconfigure the cache (or some operational aspects thereof) in advance so that it can join the CDN. Figure 3 is a simplified representation of the cache registration process, and Figure 4 represents how the third party cache is then used as an authoritative surrogate content server, just like any other CDN content server. In Figure 3, third party cache 302 registers with the content delivery network 300, providing the CDN with information about how it will participate in the network (or not). The content delivery network may include one or more dedicated registration servers 303a-n for this purpose. A registration server may be a Pentium-based machine running the Linux operating system and Apache web server software. Preferably, the cache will function in a "push" only mode wherein it can push to the CDN reports, requests, or the like. Typically, the CDN 300 does not poll the third party cache 302, and a firewall may prevent the CDN from initiating external connections. Moreover, typically the CDN will not be able to log into the cache in any way (e.g., by telnet, ssh, or the like) and, once deployed, the third party cache may or may not receive software upgrades. Thus, except possibly at configuration, the CDN may not be able to change any particular functionality of the third party cache. Preferably, the owner and administrator of the cache may tune given parameters, e.g.,

10

15

20

how frequently to send the CDN real-time statistics. Preferably, the CDN establishes default values and minimum/maximum values for such parameters.

The registration process preferably takes into consideration that there are many different ways that a cache may be deployed. In particular, a cache may be deployed behind a firewall, so that no incoming connections can be made to the cache. A cache thus may have a "public" status or a "private" status. A public machine may live outside a corporate firewall and thus can serve general purpose traffic. Effectively, a third party cache that is a public server can become a content server for the CDN. Private machines, on the contrary, are intended to be accessed only from within a given enterprise (whether or not behind a firewall). A given cache may also have CIDR block restrictions, which means that the cache may be provisioned to only get traffic from blocks of IP addresses that they "own." In addition, a cache may be provisioned to not report the IP address of a requestor in a cache log out of privacy concerns. The registration process of the invention preferably provides sufficient flexibility to manage any of these deployment options.

Thus, upon registration, the third party cache provides the CDN given information as indicated in **Figure 3**. Preferably, a registration server **305** is used for this purpose. The registration server may be a Pentium-based box running the Linux operating system and Apache web server software. The information provided by the cache may include data **306** identifying the machine as public or private. In addition, the cache may provide the CDN service restriction data **308**, which is a list of CIDR blocks that it (as a public machine) is willing to serve. If the cache restricts traffic, then the CDN must respect such restrictions. In addition, the cache preferably also provides the CDN block/pass-

10

15

20

through IP data 310. In particular, a blocking cache will not report its own IP address to the CDN or any of its clients' IP addresses. Upon registration, the cache may also provide the CDN with contact data 312, e.g., name, phone number, and email, of the technical contact responsible for the cache. In addition, the cache preferably provides the CDN performance characteristic data 314. A flexible protocol may be used for this purpose so that the CDN can ask the cache dynamically to provide performance and health statistics, and the cache can reply with the statistics it can provide. Additionally, if the cache can provide a metric, preferably it informs the CDN of the bounds of that metric during the registration process. For example, if the cache reports bits/second outgoing and its maximum link capacity, then the CDN may use this information later to estimate how close the cache is to its limits. Finally, the cache may provide the CDN a cache identifier 316 to facilitate initial registration or a renewal of a registration.

The CDN preferably provides the CDN with given information during the registration process. As also illustrated in Figure 3, preferably the CDN provides the cache with a time-to-live (TTL) indication 318, which controls how long the registration is valid. Following expiration of the TTL, the cache may need to re-register to keep itself current. In addition, the CDN preferably provides the cache given configuration information including log recipient and frequency 320, RT (real-time) statistics recipient and frequency data 322, a map URL 324, and content parsing information 326. The log recipient and frequency data 320 identifies the frequency (e.g., every 4 hours) that logs will be transmitted from the cache to the CDN. The RT statistics recipient and frequency data 322 is preferably a function of both time and number of hits. If the cache has not seen a requisite number of hits in a period, then it need not send an RT update and may

10

15

20

continue to aggregate hits until a next update period (e.g., every 30 seconds). The map URL 324 identifies a location of a network map within the CDN. Once the cache is configured into the CDN, it becomes a server in the CDN network map and, as such, may assume responsibility (i.e., become "authoritative") for delivering content. The map's default TTL is preferably long (e.g., one month). The content parsing data 326 is the information needed to identify CDN-provisioned content and to fetch it correctly as will be described below. Generally, this information includes a list of CDN-specific domain names, and a set of regular expressions (e.g., typecode, content provider code, a serial number code, or the like) for parsing CDN-specific embedded object URLs for tracking usage statistics. In addition, the CDN preferably also provides the cache a generic format that can be used by the cache to construct a CDN-specific host name, e.g., based on the typecode, content provider code, serial number code, or the like. In particular, and as described below, in order to fetch content from the CDN, the cache constructs a CDNspecific host name. During registration, the CDN thus provides the cache with the appropriate template for constructing this host-name. Finally, the CDN may provide a cache identifier (ID) 328 if this is not a renewal registration.

Upon registration, the cache is considered functional. If it is a public machine and its IP address is known (i.e., non-blocked), then the CDN can modify its network map to route traffic to the new cache, respecting the cache's CIDR block restrictions as necessary.

As illustrated in **Figure 4**, when an end user at a client machine **400** makes a request for given page content, typically the HTML for the page is served from the content provider origin server **402**, although this is not required as has been described.

10

15

20

The request may or may not pass through the third party cache 404 that has been configured into the CDN as described above. This HTML preferably has been modified to include modified URLs (so-called alternate resource locators) that point to the CDN. For more details of this process, reference should be made to U.S. Patent No. 6,108,703, which is incorporated herein by reference. The HTML is then returned to the user's browser. When the browser then attempts to resolve the alternate resource locators (ARLs) that point to the CDN, the third party cache 404, which is operating in a transparent mode, recognizes those URLs as being CDN-specific. If the requested object is not present in the third party cache 404, the cache preferably goes out to the CDN 405 (e.g., CDN edge server 406) to retrieve the object. Thus, according to the invention, preferably the third party cache must recognize when it gets a request for CDN-specific content (e.g., content that has been identified by a modified URL or by some other technique, e.g., domain name delegation or via a DNS alias) that it does not already have, and then it must go get the content. Typically, the third party cache will not explicitly understand how to parse the CDN-specific modified URL (e.g., an Akamai ARL) and other codes that the CDN may include in the modified URL, however, the cache still can determine when the requested content has been modified to be served from the CDN and, according to the invention, the cache includes appropriate intelligence so that it can get that content from the CDN. The preferred technique for accomplishing this content fetching is now described.

Conventionally, when a cache gets a request for content it does not have already, it goes back to the source. For CDN-specific content, however, the third party cache that has been provisioned into the CDN according to the present invention goes back to the

10

15

20

CDN (not necessarily the content provider origin server) to fill the request. To this end, the third party cache typically must distinguish a normal URL from a URL that has been modified to be resolved by the CDN (e.g., an Akamai ARL). There are several possible scenarios in this regard as illustrated in the high level flow diagram of Figure 5. First, if the client browser is compatible with HTTP 1.1, the HTTP request may include a HOST header. Thus, a test is performed at step 502 to determine if the request includes a HOST header. If so, the cache tries to match the host provided (in the header) against the known list of CDN domains that were provided by the CDN during the registration process. This is step 504. If there is a match as established by the test at step 506, then the cache constructs an ARL in step 508 as will be described below. If no host header is present (e.g., because the browser is not HTTP 1.1 compliant), a test is performed at step 510 to determine if the request is to another host. If so, then the cache may pass that host information along as normal. This is step 512. If the request is for a CDN-specific modified URL, then the CDN will serve up the content correctly once the request has been passed by the cache. This is step 514. If, however, the request is directly to the cache itself, then additional handling is typically performed to prevent third party caches from attempting to get content from each other, which is undesirable. This is step 516. Preferably, a third party cache parses the request and creates an ARL to get content from

Figure 6 illustrates how the cache obtains content from the CDN. This was step 508 above. In particular, when necessary to get content from the CDN, the cache first performs minimal parsing of the modified URL and extracts given information, e.g., a serial number, using standard library functions. This is step 600. Before going directly

the CDN, not from another third party cache.

10

15

20

to the CDN, the cache preferably constructs a name for a CDN host, so that the resulting URL may look similar to: aSERIAL.c.akamai.net:/TYPCODE/SERIAL/CP/..., where TYPCODE is the typecode, SERIAL refers to the serial number, and CP refers to the content provider code obtained during the registration process. This is step 602. It is not required that all of these data fields be used, of course. At step 604, the cache-modified URL is sent to the CDN. At step 606, the CDN recognizes the "c" or other identifier (indicating that the request originates from a third party cache) and preferably steers the request to a closest CDN server (e.g., using conventional CDN intelligent routing). At step 608, the requested object is returned to the cache. The cache stores the object at step 610 and then returns it to the requesting client browser at step 612 to complete the process.

As described in U.S. Patent No. 6,108,703, the serial number may identify a virtual content bucket in a set of content servers within the CDN in which the requested object is expected to be found. Thus, when the serial number is used by the cache to generate a URL as described above, the identity of the closest server is identified and derived from the information passed to the third party cache during the registration process.

A regular expression match is not a guarantee that the cache has found a CDN-specific modified URL, because other URLs could match the CDN's format. Upon a match, however, the cache may then parse out the serial number and use it to generate a new host name in the new modified URL. Using the new modified URL, the cache can then attempt to get the content; it if fails, then it can fall back and use the original URL to attempt to fetch the content.

10

15

20

When the cache sends its request to the CDN, it may change a User-Agent: host header to signal to the CDN that is should be able to cache the results. The third party cache (namely, the User-Agent) should then include its CDN identifier that was provided during registration. The CDN server that responds to the request may then change the headers that are sent back to the cache to reflect the correct caching semantics based on the type of content requested. This prevents the cache from having to understand the meanings of the various CDN content type codes.

Preferably, the CDN allocates sufficient resources (e.g., servers) to facilitate use of the third party caches by the CDN. Thus, for example, the CDN may provision a given low level DNS server to manage content requests originating from a set of third party caches that, together, form a content delivery region within the context of the CDN. The set of third party caches need not, however, be located in the same geographic location even when they are managed as a "region" within the CDN.

As described above, during normal operation, the third party cache preferably sends the CDN NOC real-time statistics as well as log files. A more lightweight architecture may be implemented if real-time statistics are not required. When those statistics are provided, they are usually delivered to the CDN frequently, e.g., every 10 seconds by default, although preferably this value is configurable up to a maximum value. As illustrated in **Figure 4**, the CDN preferably includes a real-time statistics server **408**, such as a Pentium-based machine running the Linux operating system and Apache web server, for accepting the data, preferably via HTTP or some other convenient transport mechanism. Preferably, the data sent from the cache to the CDN

10

15

20

statistics server 408 comprises the following (averaged as appropriate) over the real-time reporting period:

- 1. Health. Statistics reflecting the performance of the machine so we make load balancing decisions.
- 2. <u>Usage.</u> These give the CDN ongoing usage statistics (e.g., such as bytes and hits served), which are useful for accurate billing and system monitoring.

Periodically, for billing purposes, the cache preferably provides the CDN a dump of the complete logs for the content served by the cache. Alternatively, the cache may send just the log entries for CDN-specific content as can be identified by the matching rules described previously. As illustrated in **Figure 4**, a log server **410** may be used for this purpose. The log server **410** may be a Pentium-based box running the Linux operating system and Apache web server software. Preferably, this dump is sent securely (e.g., via https) and in a compressed format, together with the cache identifier. Upon receipt, the CDN may provide the cache an HTTP "**200** OK" message or the like. The cache may then flush these log entries. If the transmission could not begin, or was interrupted, then the cache may retry.

One of ordinary skill in the art will appreciate that integration of third party cache appliances into a CDN according to the present invention facilitates network content sharing arrangements, or so-called "content peering." In particular, it is assumed that a given third party cache that has been configured into the CDN is also part of a third party network used for transport, hosting and/or delivery of content provider content. The operator of the third party network may then make appropriate contractual or other arrangements with the CDN so that, in effect, the responsibility for delivering the content

10

15

provider's content is shared by the CDN and the third party network whose cache appliances have been configured into the CDN according to the present invention. With appropriate content peering arrangements in place, the CDN may then provide the third parties (e.g., hosting providers, other content delivery networks, access and other network service providers, technology providers, and the like) appropriate services and share in revenues generated as a result. As an example, because the CDN has the capability of receiving cache logs, preferably in a secure manner, the CDN can function as a centralized billing and reporting mechanism for a set of third party service providers who, through the external cache interface mechanism of this invention, use the CDN for content delivery. In effect, the CDN then provides billing and payment services to compensate the third parties that participate in the content peering arrangements. As a particular example, the CDN may bill various content providers who use the CDN (together with the third party caches) and share the resulting revenues with those parties who have a content peering or other arrangement with the CDN. Generalizing, by enabling third party "edge-based" caches to be provisioned into a CDN, one or more third parties may "peer" with the CDN and each other to allow participants to share their networks and content delivery resources.

The following is a preferred detailed design of the external cache interface support mechanism of the present invention.

20 Registration Request and Response

Preferably, cache registration is done through a secure HTTP GET request to a CDN registration server. Several CDN servers may be provisioned to handle these requests. The first should be tried, and if it is unavailable, then the others in succession.

During registration, the cache delivers to the CDN a list of metrics it can provide.

Preferably, the cache supports a minimum list of statistics in order to participate in the

CDN, for example:

· · · · · · · · · · · · · · · · · · ·	*	Table 1	: Real-Time Statistics	
Statistic	Token	Required?	Description	
Health			A DIDANA VA NAMANA V	
Overall Health	hlth	Yes	A 0-100 scaled value indicating the cache's own determination of its health. This will be the primary metric used for load balancing.	
Total Bytes/Sec Total Hits/Sec	tbps thps	Yes Yes	Aggregate data rate and HTTP requests served	
CDN Bytes/Sec CDN Hits/Sec	abps ahps	Yes Yes	Data rate and HTTP requests for CDN content only	
CIDR Bytes/Sec CIDR Hits/Sec	cbps chps	No No	Data rate and HTTP requests for each CIDR block served by the Cache	
Total Packet Loss	tlos	No	Percentage of packets lost for entire Cache	
CIDR Packet Loss	clos	No	Percentage of packets lost by CIDR block.	
Total Packet Latency	tlat	Yes	Packet latency experienced for entire Cache, in seconds, averaged over the reporting period	
CIDR Packet Latency	clat	No	Packet latency experienced, measured over each CIDR block, in seconds and averaged over the reporting period.	
Open Connections	conn	No	Number of concurrent connections the Cache has had open, averaged over the reporting period	
Usage				
CP Bytes/Sec CP Hits/Sec	cpbs cphs	Yes Yes	Data rate and HTTP requests for CDN content, aggregated by content provider as parsed out of the modified URL.	
CIDR Bytes/Sec CIDR Hits/Sec	cibs cihs	Yes Yes	Data rate and HTTP requests for CDN content, aggregated by CIDR network block as broken down by the Map provided.	
Serial Number Bytes/Sec Serial Number Hits/Sec	sebs	Yes Yes	Data rate and HTTP requests for CDN content, aggregated by serial number as parsed out of the ARL.	

If any of the metrics values change, then preferably the cache initiates a reregistration as soon as possible. Misinterpreting the statistics could cause unpredictable performance results. If the cache can provide the required real-time statistics requested, then the registration proceeds. In particular, the CDN registration server sends the new ID for the cache (or echoes the existing ID back in the case of a re-registration).

Details: Registration Request

Request Headers:

5

10

15

GET /register http/1.1[cr/lf]

Host: register.[Vendor].akamai.com[cr/lf]

Via: [Cache product name][cr/lf]

Content-type: application/octet-stream[cr/lf]

Content-length: [number of bytes in request data][cr/lf]

[cr/lf]

[binary data]

Registration request binary data content (all numbers in network order):

Field	Description		
unsigned int lCDNID	Zero on the initial request. On subsequent re- registration requests this is the value provided by the CDN in the registration response (below).		
byte cMajorVersion byte cMinorVersion	Cache vendor's version number.		
byte cOpCode	Request op code		
byte cFlags	Whether the Cache is public or private (P) and if the client IP's are going to be blocked (B). If P=0, CDN will not direct requests to the Cache (behind firewall). If B=0, IP addresses are to be passed through. If this value is 1, then all logs will contain 0.0.0.0 as the requesting IP address.		
byte cToken[64]	An encrypted version of the first 64 bits of data (ICDNID, cMajorVersion, cMinorVersion, cOpCode, and cFlags). It is preferably encrypted using a 512 bit (64 byte) private key.		

	Authentication by the CDN is performed by decrypting this field using a public key provided by the Cache and comparing each values to those passed in the structure. If the comparison fails, the request is rejected.
byte cNumberCidrBlocksToServe struct sCidrBlock { unsigned int ip; short mask; } CidrBlocksToServe[];	Allow the Cache system administrator to provide a list of IP blocks that will be served on the Cache. CidrBlocksToServe is an array with cNumberCidrBlocksToServe number of elements. If cNumberCidrBlocksToServe is 0, all IP addresses will be served and the array will not be there.
char AdminName[] char AdminPhone[] char AdminEMailAddress[]	Null-terminated character arrays with contact information in case of problem.
char RTLogFormat char FullLogFormat	Strings containing list of tokens describing what the format of both the real-time statistics and full log reports will contain. The format should be used by the CDN to parse those fields later after initial validation during registration.

Details: Registration Response

http/1.1 [response code][cr/lf]

Server: Akamai[cr/lf]

Content-type: application/octet-stream[cr/lf]

Content-length: [number of bytes in response data][cr/lf]

[cr/lf]

[binary data]

Request response binary data content (all numbers in network order):

10

5

Field	Description
unsigned int lCDNID	On an initial request the new ID assigned to the Cache by the CDN. On a re-registration the same ID as before is sent back.
long lRegistrationTimeToLive	Number of seconds that this registration is valid. Upon expiration, Cache will re-register. The default value for this is seven days (604800 seconds).
byte cSecretServerID[]	The CDN authentication key for the

	real-time and full log reports.
long lMapFrequency	The number of seconds between Map updates.
long lFullLogFrequency	The number of seconds between full log updates.
long lRTLogFrequency long lRTLogMaxHits	These two together specify the frequency that the real-time statistics will be reported. IRTLogFrequency represents the number of seconds between reports unless IRTLogMaxHits has not been achieved. If such is the case, the condensed log will be sent once IRTLogMaxHits has been accumulated<./td>
char RequestFillURL[]	The domain name to use when the Cache makes requests to the CDN network (e.g. c.akamai.net.
char cFullLogURL[]	The URL to which the logs will be reported. It is a 0 terminated character array.
char cRTLogURL[]	The URL to which the condensed (real time) log will be reported. It is a null-terminated character array.
char cMapURL[]	The URL from which the Geographic/CIDR Map is to be retrieved. It is a null-terminated character array.
char ARLparseType[] char ARLparseCP[] char ARLparseSer[]	
Three regular expressions for matching a URL modified by the CDN (e.g., an Akamai URL). An URL can be said to point to CDN content if, for example, it satisfies all three regular expressions. This need not be stringently enforced, however, if performance requirements merit using only one regular expression. Each one should be applied to pull apart the URL into its components parts (i.e. typecode, content	

provider code, and serial number) to generate a new ARL or for statistics gathering.	
char cCDNHostList[][]	The list of all CDN host names. The names may be wild-carded, i.e. *.g.akamai.net will represent all these host names regardless of the serial number. This field is an array of null-terminated character arrays. The final entry in the list will be double null-terminated.

Details: De-Registration Request

GET /deregester http/1.1[cr/lf]

Host: register.[Vendor].akamai.com[cr/lf]

Via: [Cache product name][cr/lf]

Content-type: application/octet-stream[cr/lf]

Content-length: [number of bytes in request data][cr/lf]

[cr/lf]

[binary data]

10 De-registration request binary data content (all numbers in network order):

Field	Description	
unsigned int ICDNID	The value provided by the CDN in the registration response.	
byte cMajorVersion byte cMinorVersion	The Cache vendor's version number.	
byte cOpCode	Op code	
byte cFlags	null	
byte cToken[64]	An encrypted version of the first 64 bits of data (ICDNID, cMajorVersion, cMinorVersion, cOpCode, and cFlags). It is encrypted using a 512 bit (64 byte) private key. Authentication by the CDN preferably is performed by decrypting this field using a public key provided by the Cache and comparing each values to those passed in the structure. If the comparison fails, the request is rejected.	

Details: De-Registration Response

The de-registration response will be made using the standard HTTPS Get response format. There is no need for attached data in the de-registration response.

http/1.1 [response code][cr/lf]

Server: Akamai[cr/lf]

5

10

15

Real-Time Statistics Transmission

As noted above, preferably real-time health and usage statistics are sent by an HTTP GET request to a CDN server. Preferably, the CDN uses several servers that can respond to these transmissions for redundancy. Within the CDN, the server name may resolve to an Apache server for gathering cache statistics. It may or may not be the same server as the registration server.

Each statistic is uploaded preferably as a triple:

- 1. <u>Token</u> The token from Table 1 above.
- 2. <u>Specifier</u> The usage statistics aggregate over different parameters, which are reflected in this field. For example, when reporting bits/second data by serial number, this field is for the individual serial number.
- 3. <u>Measure</u> A number representing the measurement in binary format Although not required, preferably the statistics themselves will be reported as a list of these triples, with the final entry signaled by a length zero token.

20 Detail: Real-Time Statistics Request

GET /stats-upload http/1.1[cr/lf]

Host: [RT stats server provided during registration][cr/lf]

Via: [Cache product name][cr/lf]

Content-type: application/octet-stream[cr/lf]

Content-length: [number of bytes in request data][cr/lf]

[cr/lf]

[binary data]

The real-time statistics upload request binary data format (all numbers in network order):

30

25

Field	Description
unsigned int ICDNID	The value provided by the CDN in the registration response.
byte cMajorVersion byte cMinorVersion	The Cache vendor's version number.
byte cOpCode	Op codes
byte cFlags	Null
long ISerialN	The number passed in the previous upload response.
byte cMD5Hash[16]	Used by the CDN to authenticate the real-time log upload request. It may be a MD5 128-bit fingerprint of CDNID, cMajorVersion, cMinorVersion, cOpCode, cFlags, lSerialN, and SecretServerID (received at registration).
byte RTData[]	The stream of statistics to be interpreted by the specification passed during registration in RTLogFormat.

Detail: Real-Time Statistics Response

http/1.1 [response code][cr/lf]

Server: Akamai[cr/lf]

	* * * * * * /	1111	1/1/ / / //	2 70700		1 1/4/ /1/	
Field	.,	AZARANIZ III		Description			***************************************
long	The nu	mber that Ca	che should	l include in t	he next r	egistration	9
1SerialN	request	. This is esse	ential to pro	event replay	attacks.		

5 Cache Log Transmission

Preferably, web logs are sent by a cache using an https GET to a given server identified by a CDN-specific domain. If required, log format conversions are done and then sent to a billing mechanism for processing, which may involve reconciliation and billing of multiple third parties that may be participating in content peering relationships with the CDN. The following format describes a structured list of the fields that may be included in a log upload. If more convenient, the log could be maintained in a flat ASCII file, and compressed and streamed into the request.

Detail: Log Transmission Request

GET /log-upload http/1.1[cr/lf]

Host: [host provided during registration][cr/lf]

Via: [Cache product name][cr/lf]

Content-type: application/octet-stream[cr/lf]

Content-length: [number of bytes in request data][cr/lf]

[cr/lf]

5

[binary data]

10 Log transmission request binary data content (all numbers in network order):

Field	Description (All Manager Control of the Annual Control of the Annu
unsigned int ICDNID	The value provided by the CDN in the registration response.
byte cMajorVersion byte cMinorVersion	The Cache vendor's version number.
byte cOpCode	Op code
byte cFlags	Null
byte cToken[64]	An encrypted version of the first 64 bits of data (ICDNID, cMajorVersion, cMinorVersion, cOpCode, and cFlags). It is encrypted using a 512 bit (64 byte) private key. Authentication by the CDN preferably is performed by decrypting this field using a public key provided by the Cache and comparing each values to those passed in the structure. If the comparison fails, the request is rejected.
byte zippedLog[]	A compressed version of the log data. The log should include the fields as specified in the FullLogFormat field specified during registration.

Having thus described our invention, what we claim as new and desire to secure by Letters Patent is set forth in the following claims.

CLAIMS

- A content delivery method operative in a network, comprising:
 configuring a third party cache into a content delivery network having a set of
 edge caches located at given network locations;
- responsive to given content requests received at the third party cache, serving requested objects from the third party cache; and

periodically transferring a log from the third party cache to the content delivery network identifying the objects served from the third party cache.

- 10 2. The method as described in Claim 1 further including the step of parsing the log to identify given content.
 - 3. The method as described in Claim 2 further including the step of having the content delivery network bill a content provider for delivery of the given content from the third party cache.
 - 4. The method as described in Claim 3 further including the step of sharing revenue between the content delivery network and an owner of the third party cache.

20

15

INTERNET CONTENT DELIVERY SERVICE WITH THIRD PARTY CACHE INTERFACE SUPPORT


ABSTRACT OF THE DISCLOSURE


5

10

15


Third party cache appliances are configured into a content delivery service to enable such devices to cache and serve content that has been tagged for delivery by the service. The invention enables the content delivery service to extend the reach of its network while taking advantage of high performance, off-the-shelf cache appliances. If the third party caches comprise part of a third party content delivery network, the interconnection of caches to the CDS according to the present invention enables the CDS and the third party network to share responsibility for delivering the content. To facilitate such "content peering," the CDS may also include a traffic analysis mechanism to provide the third party network with preferably real-time data identifying the content delivered by the CDS from the third party caches. The CDS may also include a logging mechanism to generate appropriate billing and reporting of the third party content that is delivered from the cache appliances that have been joined into the CDS.

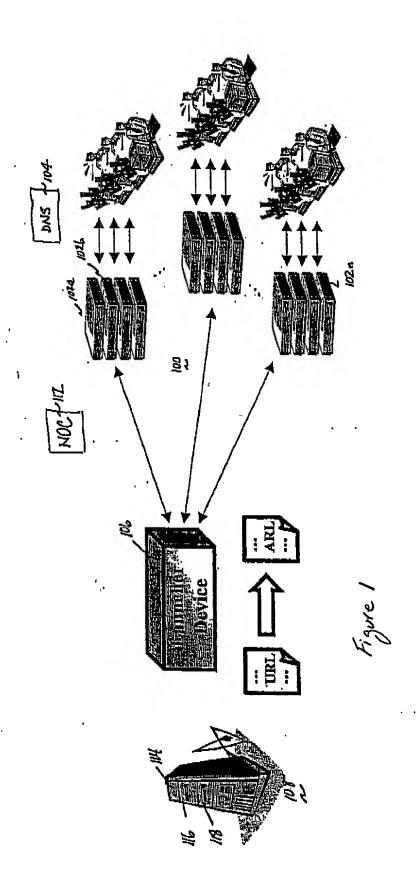


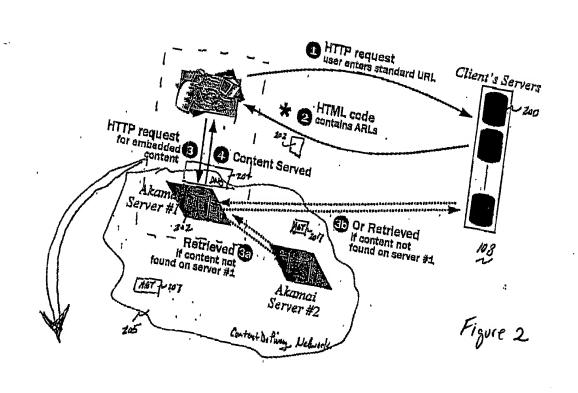

The state of the s

12293:41 3/4

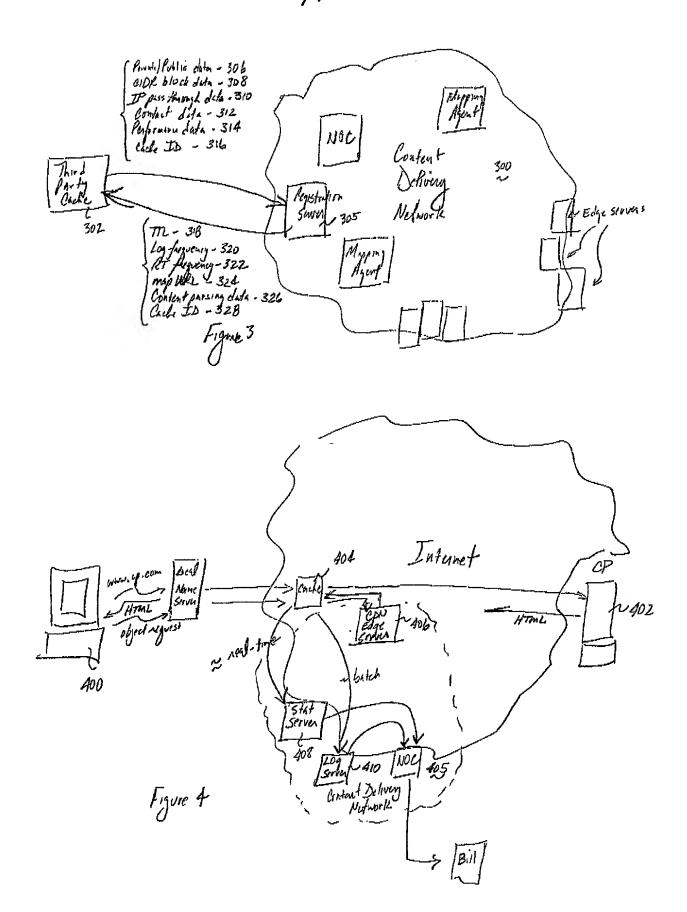

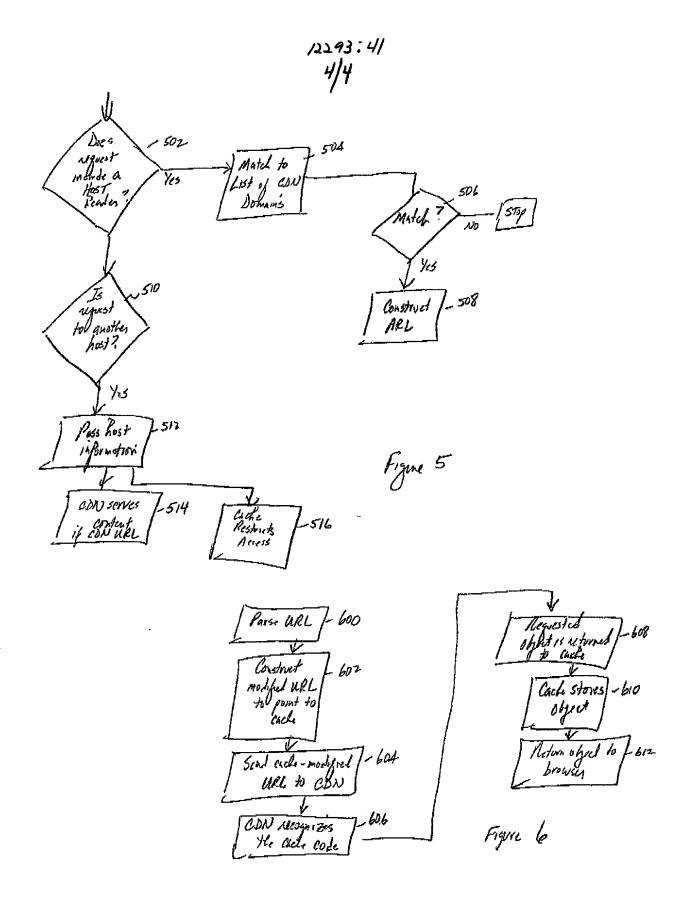

DECLARATION AND POWER OF ATTORNEY FOR

PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

INTERNET CONTENT DELIVERY SERVICE WITH THIRD PARTY CACHE INTERFACE SUPPORT

the sp	ecificatio	n of which (check	c one):	
X	is attach	ed hereto.		
<u> </u>	• •	cation Serial No ch was amended o	on (if applicable)	
		cification, includir		nd the contents of the above ended by any amendmen
•		f this application		n which is material to the Title 37, Code of Federa
and h	of any f nave also icate hav	oreign application identified below	(s) for patent or inventor any foreign application	tle 35, United States Code or's certificate listed belov on for patent or inventor's lication on which priority i
Prior	Foreign A	pplication(s):		Priority Claimed
(Num	ber)	(Country)	(Day/Month/Year)	Yes No

Atty. Dkt. No. 12293:41

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial #)	(Filing Date)	(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

David H. Judson, Reg. No. 30,467 Andrea P. Bryant, Reg. No. 28,191 Theodore Stevenson, III, Reg. No. 39,040 Christopher T. Bovenkamp, Reg. No. 44,551 Peter R. Lando, Reg. No. 45,513 Gregory W. Carr, Reg. No. 31,093 Jack D. Stone, Jr., Reg. No. 38,324

Send correspondence to: David H. Judson, Hughes & Luce, L.L.P., 1717 Main Street, Suite 2800, Dallas, Texas 75201 and direct all telephone calls to Mr. Judson at 214/939-6231.

Atty. Dkt. No. 12293:41

FULL NAME OF FIRST INVENTOR:	Daniel M. Lewin
INVENTOR'S SIGNATURE:	
DATE:	
RESIDENCE:	292 Vassar Street #D6 Cambridge, MA 02139 Middlesex County
CITIZENSHIP:	U.S.A.
FULL NAME OF SECOND INVENTOR:	Bruce Maggs
INVENTOR'S SIGNATURE:	
DATE:	
RESIDENCE:	711 Copeland St. Pittsburgh, PA 15232
CITIZENSHIP:	U.S.A.
FULL NAME OF THIRD INVENTOR:	John Josef Kloninger
INVENTOR'S SIGNATURE:	
DATE:	
RESIDENCE:	6 Magazine Court Cambridge, MA 02139
CITIZENSHIP:	U.S.A.